

The Hawk 4D

Barcode Printer

- Economical
- Reliable
- Simple to Use
- Easy to Load
- Software included
- USB Cable included
- Desktop Sleek Style

The Hawk 4D is a thermal printer that is great for every day use.

The Hawk 4D is a straight-forward, budget-friendly printer that sets up easily and prints reliably.



Software and
USB Cable included



Century
Hawk 4D


Save Money. Print Better.™

HawkLabel Professional Grade Design and Print Label Software is included

**hawklabel**™

- Professional Grade
- Full Version Label Software
- Handles Databases with ease
- Comparable to the pro versions of other leading label software packages

Professional results! Easy on the budget!

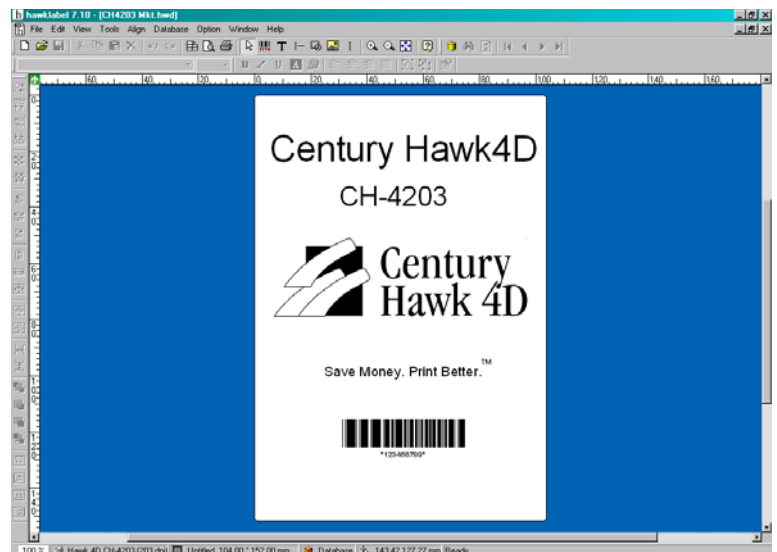

Century Hawk 4D Thermal Printer

Technical Specifications

| | |
|-----------------------|--|
| Print Mode | Thermal Transfer/Direct Thermal |
| Print Resolution | 203dpi |
| Max Print Speed | 3" ips |
| Max Print Width | 4.09" |
| Max Print Length | 20" inner diameter |
| Standard Accessories | CD which includes full version label editing software HawkLabel / Manual, Power cord, USB Cable, Quick Start Guide |
| Memory | 2MB Flash, 2MB SDRAM |
| Media | Roll-feed, die-cut, continuous, fanfold, tags, tickets in plain paper or thermal paper. Width: 4.33" max, 1.06" min., Supply roll: outer diameter: 4" max, inner diameter: 1" min |
| Ribbon | Wax, resin, wax-resin mixed. Coated side out. Ribbon roll: outer diameter: 2.75" max, inner diameter: 1" min Max width: 4.33". Recommended Ribbon: Century Falcon Black |
| Media Sensor | Reflective (adjustable) |
| Fonts | Windows True Type fonts (when using Windows drivers) |
| Barcode Types | Code 39, Code 93, Code 128/subset A,B,C, Codabar, Interleaved 2 of 5, UPC A/E 2 and 5 add-on, EAN-13/8/128, UCC-128, Postnet, Plessey, HBIC, Telepen, FIM, Maxicode, PDF417, Data Matrix, QR |
| Interfaces | USB, Serial RS-232 |
| Electrical | Input: 24 VDC, 2A |
| Weight | 6.17 lbs |
| Dimensions | Width: 9.29", Depth: 11.46", Height: 7.83" |
| Operating Environment | Operation: 40° to 100° F (0° to 40° C) Relative humidity: 5% - 85% non-condensing |
| Storage Environment | Storage: -40° to 140° F, (-40° to 60° C) |
| Options | 10-100M bit Ethernet Interface Card, Centronics parallel port |

Specifications listed are for base model printers with standard features only.
Specifications subject to change without notice.
All products and brand names are trademarks of their respective companies.
All rights reserved.
©2008 by Century Systems, Inc.

