

The Hawk 4

Software and
USB Cable included

Barcode Label Printer

- Simple to Use
- Easy to Load
- Software Included
- USB Cable Included



The Hawk 4 is built with a space-saving, easy-open clamshell design and is lightweight.

The Hawk 4 is simple to use and comes with software, USB and parallel ports, and a USB cable. Print right out of the box!




Save Money. Print Better.™

HawkLabel Professional Grade Label Design and Print Software is Included

**hawklabel**™

- Professional Grade
- Full Version Label Software
- Handles databases with ease
- Comparable to the pro versions of other leading label software packages

Professional results! Easy on the budget!

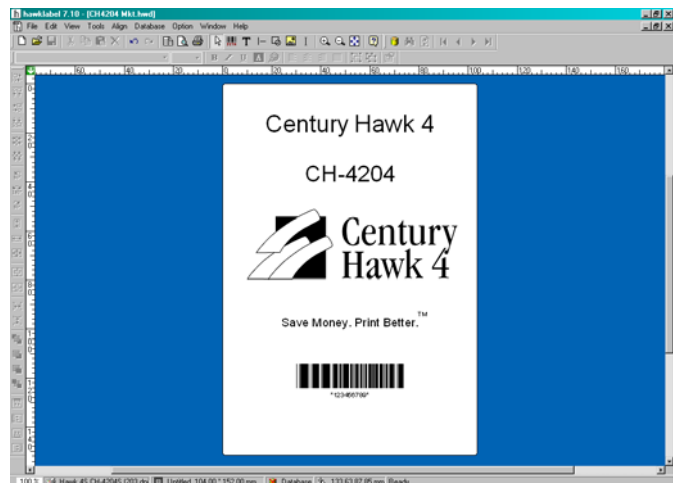

Century Hawk 4 Thermal Printer

Technical Specifications

Print Mode	Thermal Transfer/Direct Thermal
Print Resolution	203 dpi or 300 dpi
Max Print Speed	4" ips (203 dpi), 3" ips (300 dpi)
Max Print Width	4.25" (203 dpi), 4.17" (300 dpi)
Max Print Length	40" (203 dpi), 30" (300 dpi)
Standard Accessories	CD which includes Hawklabel full version label editing software / Manual, Power cord, USB Cable, Quick Start Guide
Memory	2MB Flash, 4MB SDRAM
Media	Direct thermal paper, thermal transfer paper, copperplate paper, PVC, PET, etc. Width: 4.33" max, .98" min., Supply roll: outer diameter: 6" max, inner diameter: 1" min
Ribbon	Wax, resin, wax-resin mixed. Coated side out. Ribbon roll: outer diameter: 2.75" max, inner diameter: 1" min Max width: 4.33". Recommended Ribbon: Century Falcon Black
Media Sensor	Reflective (adjustable) and transmissive
Fonts	Windows True Type fonts (when using Windows drivers), resident fonts
Barcode Types	Code 39, Code 93, Code 128/subset A,B,C, Codabar, Interleaved 2 of 5, UPC A/E 2 and 5 add-on, EAN-13/8/128, UCC-128, Postnet, Plessey, HBIC, Telepen, FIM, Maxicode, PDF417, Data Matrix, QR
Interfaces	USB, Centronics parallel port, Serial RS-232
Electrical	Input: 24 VDC, 2A
Weight	7.71 lbs
Dimensions	Width: 10.08", Depth: 12.95", Height: 7.87"
Operating Environment	Operation: 40° to 100° F (0° to 40° C) Relative humidity: 5% - 85% non-condensing
Storage Environment	Storage: -40° to 140° F, (-40° to 60° C)
Options	Ethernet Interface Card, 10-100M bit

Specifications listed are for base model printers with standard features only.
Specifications subject to change without notice.
All products and brand names are trademarks of their respective companies.
All rights reserved.
©2008 by Century Systems, Inc.

